




RainPoint[®]
More Than Water Saving

Save the user manual for future reference. If you have any questions, please contact us to get support.

Garden Soaker Hose

USER MANUAL

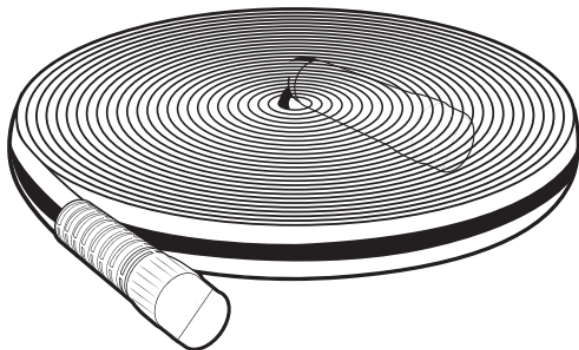

Model NO.: HL1202




Email
service@rainpoint.com



Hotline
US: +1 833-381-5659
DE: +49 800-182-0576
UK: +44 20-4628-3036

PRODUCT OVERVIEW


The soaker hose is designed to provide efficient irrigation by delivering water directly to the soil through its porous material. Ideal for gardens, flower beds, and vegetable patches, it helps conserve water and promote healthy plant growth.

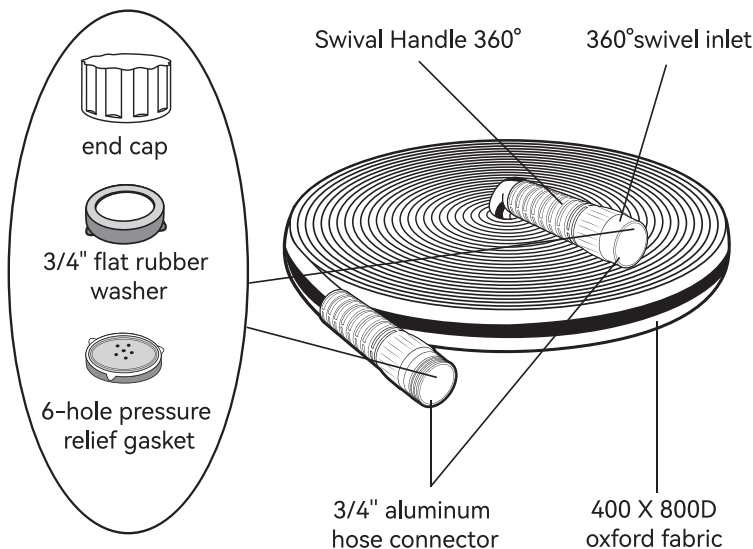

SPECIFICATION

ITEM	SPECIFICATION
Hose Inner Diameter	1/2inch
Hole Spacing	20cm for hose of 50FT and above/12cm for hose of 49FT and below
Working Pressure	40-60PSI
Material	rubber-plastic inner tube+400 X 800D oxford fabric cover+aluminum inlet & outlet


HOW TO USE

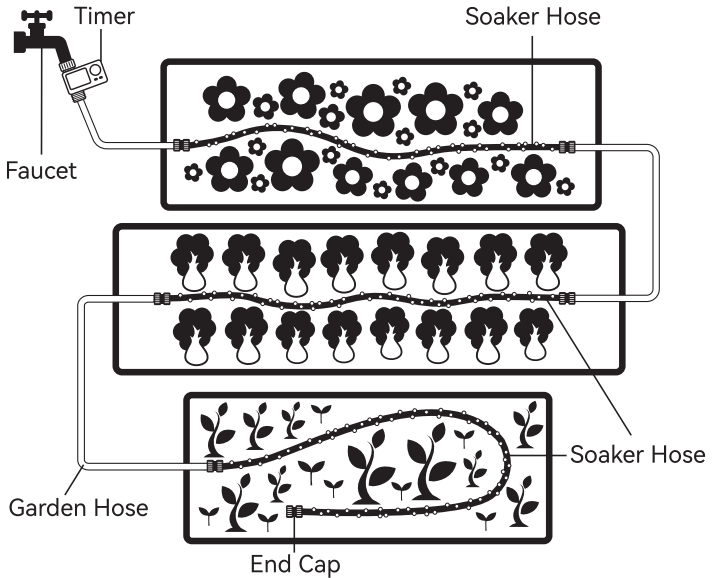

1. Connect the soaker hose to the water source via the female connector.
2. Install the soaker hose near the root of the plant in a nice flowing curve.
3. Install a end cap on the other end of the soaker hose.
4. Turn on the water source, and control the water pressure between 40- 60 PSI for normal use.

TIP:



1. Tighten the end cap before use to prevent leaks.
2. Unroll the soaker hose and lay it flat on the surface before use. Turn on the faucet to fill the hose, ensuring smooth water flow. Avoid blockages inside the hose that may affect performance.




NOTE:

1. Water pressure should be between 40 psi-60 psi.

If it's too low, the water flow will be weak. If it's too high, the water will spray at a high speed of the soaker hose's holes.





2. Usage of 6-hole pressure relief gasket




The female connector of the soaker hose has been equipped with a 6-hole pressure relief gasket to reduce water pressure and filter impurities for installing near water source. **Please ensure that the grooves of the rubber gasket are facing outside to achieve connection sealing to prevent leakage.**

3.Usage of 3/4" flat rubber washer

- When a soaker hose is connected to another soaker hose, please remove the 6-hole pressure relief gasket to prevent the water pressure from being too low, and put on a 3/4" flat rubber washer to avoid leakage.




- At the end of the soaker hose, please also install a 3/4" flat rubber washer to avoid leakage.





4.Please use soaker hose on the surface.



Do not cover the soil to prevent blocking.

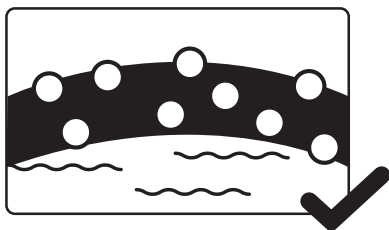


5.Ensure that the soaker hose is not kinked in use.

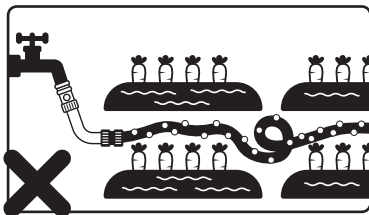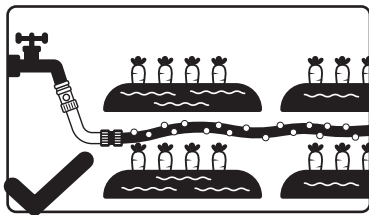

6.Keep the soaker hose in level. If you must go uphill, use garden hose and fittings to connect the soaker hose.

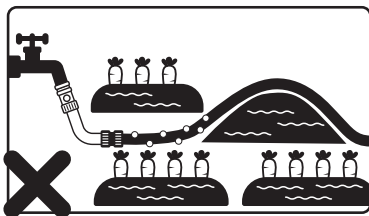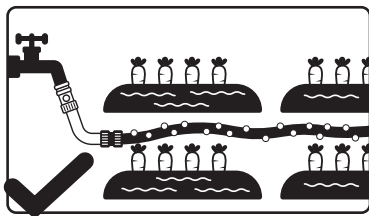

7.The maximum length for an effective soaker hose is 100 feet. The continuous line of soaking hose should not exceed 100 feet.

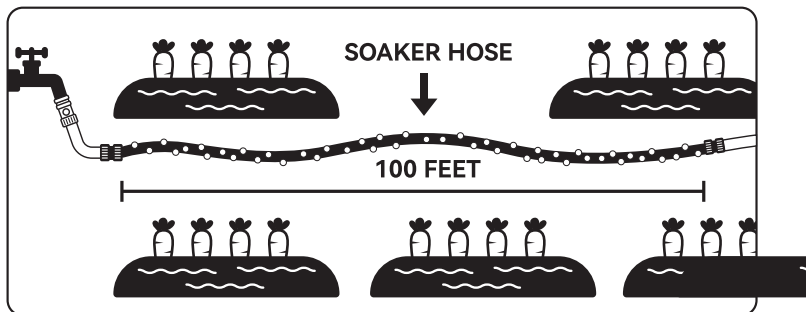

WARRANTY POLICY

We provide a 12-month limited warranty period for the original purchaser/user, which starts from the date of original purchase. The warranty covers any defect in material or workmanship. During the warranty period, we will fulfill its warranty obligations by repairing or replacing the parts or the entire unit covered by the warranty free of charge according to the actual situation.

CUSTOMER SERVICE

Our local professional customer service team guarantees hassle-free solutions within 24 hours on working days. If you have any problems with this product or during use, please do not hesitate to contact us, we will try our best to solve it and offer you satisfactory service including replacement or refund.

In order to serve you better, please remember to provide us with your order number and fault description of the product and contact us by:

US Hotline : +1 833-381-5659

DE Hotline : +49 800-182-0576

UK Hotline : +44 20-4628-3036

Email: service@rainpoint.com

EC REP

NAME: VIAJE ELECTRONIC COMPANY LIMITED

ADDRESS: E588,13 ADELAIDE ROAD, DUBLIN, D02 P950,IRELAND

Email: VIAJEELE@outlook.com

UK REP

NAME: SUJE ELECTRONIC COMPANY LIMITED

ADDRESS: S211 92a Bury Old Road, Manchester, England, M45 6TQ

EMAIL: SUJEELECTRONIC@outlook.com

BALDR INTERNATIONAL LLC

16192 COASTAL HIGHWAY, LEWES, DE 19958



Made in China